


TR Series Air-cooled Engines



TR661G1

**fixed speeds
1500/1800 rpm**

88 – 116 kWm | 120 – 158 bhp

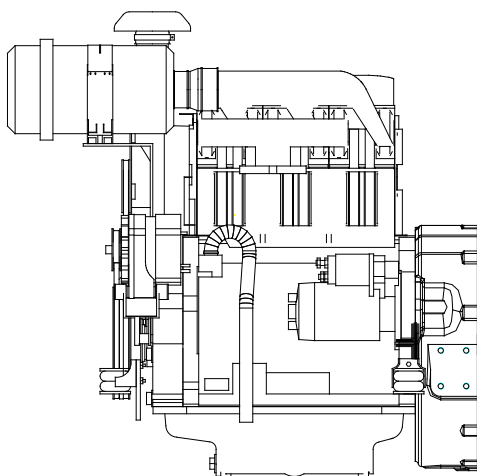

DESIGN FEATURES AND EQUIPMENT

- Air cooling system
- 12V /24V Starter Motor
- 12V /24V charged generator
- Diesel engine electrical shutdown device (Generator application only)
- Automatic belt tensioner
- V-belt broken warning device
- Belt guard (Generator application only)
- 4 Engine elastic supports
- SAE Flywheel and housing
- Oil filter
- Fuel filter
- Air cleaner
- Oil temperature sensor and alarm switch
- Oil pressure sensor and alarm switch
- Electronic governing system

OVER VIEW

The engine is designed for Power Generating Application and is suitable for use in any stage II emission territory. It is durable, reliable and easy for maintenance.

Note:

For further information and approval please contact Application Department

OPTIONAL ITEMS

- Absorption type exhaust silencer suitable for remote mounting
- Spark arrestor type exhaust silencer
- Exhaust manifold-cum-silencer (Non-turbocharger engine only)
- Diesel engine supports suitable for rigidly mountings
- Pre-heating system aim for starting from -5 to -40°C
- 12V/ 24V Diesel engine electrical adjusting speed control device
- Mechanical shutdown lever
- All kinds of meter for diesel engine

Note: The final interpretation is reserved by Lister Petter Engine Company.

POWER OUTPUTS | STAGE II EMISSIONS RATINGS

Model	Speed, RPM	Power	Engine Net		Standard Generator Output*		
			kW	bhp	Power	kVA	kWe
TR661G1	1500	Prime	88	120	PRP	95	86
		Standby	96	130	ESP	118	95
TR661G1	1800	Prime	106	144	PRP	118	95
		Standby	116	158	ESP	131	105

*The suggested continuous power is 80% prime power.

DATA SHEET**General Engine Data**

Model	TR661G1
Type	4-stroke in-line, air cooled Turbo charging
Combustion System	direct injection
Cylinder type	replaceable cylinder liner
Cylinder No.	6
Bore/ Stroke	102×125mm
Displacement	6.128L
Compression Ratio	19: 1
Firing Order	1-5-3-6-2-4
Injection Timing	18°BTDC
BMEP Pressure	2.5~3.0MPa
Direction of Rotation	Anticlockwise from flywheel housing side
Flywheel Housing	SAE3
Flywheel	SAE 10-11.5

Valve system

Type	Overhead valve type
Number of valve	Intake 1, exhaust 1 per cylinder
Valve lashes at cold	Intake 0.15mm Exhaust 0.15mm

Valve timing

	Open	Close
Intake valve	52°.BTDC	77°.ABDC
Exhaust valve	73°.BBDC	52°.ATDC

RATING DEFINITIONS TO ISO 3046**ISO Standard Conditions**

Barometric pressure 100kPa
Relative humidity 30%
Ambient air temperature at the intake manifold 25°C

Power Standards

The engine performance corresponds to ISO 3046, BS 5514 and DIN 6271. The technical data applies to an engine without cooling fan and operating on a fuel with calorific value of 42.7 MJ/kg (18360 BTU/lb) and a density of 0.84 kg/liter (7.01 lb/US gal, 8.42 lb/Imp gal).

Rating definition has basis in ISO 3046 & 8258-1, the tolerance of engine power is ±3%

Standby power rating is the supply of max emergency power under running variable load for the duration of none availability of the Mains, NO OVERLOAD capacity is adopted at this rating, furthermore, this published standby rating can be operated 500 hour/ year.

Prime Power rating is available for unlimited hours per year with variable load, of which are average engine load factor is 80% of the published prime power rating, incorporation of a 10% overload for 1 hour in every 12 hours of operation is permitted.

Base load is available for continuous published baseload power.

Derating

For non-standard site conditions, reference should be made to relevant BS, ISO & DIN standards.

Notes:

1. Power ratings are measured at the flywheel end.
- 2.. Power ratings and fuel consumption figures apply to a fully run-in, non derated engine without a radiator and fan fitted, and without power absorbing accessories or transmission equipment.

* The power output of the generator data is calculated using a typical efficiency of the AC generator. The kVA and kWe values are converted as per standard power factor 0.8. Generator data is for reference only.


Fuel System	
Injection pump	Inline "A" type
Governor	Electronic governing
Fuel lift pump	Mechanical
Nozzle	Multipoint
Injection pressure	250kg/cm ²
Fuel filter	Paper filter type
Fuel	Diesel
Lubrication system	
Lubrication type	Pressure supply
Oil pump	Gear driven
Oil filter	Paper filter type
Oil pan	Max. 11L min. 7.4L
Inclination	Fan side 18°
	Flywheel side 20°
	Motor side 37°
	Oil pump side 40°
Lube oil grade	According to operating manual
Cooling system	
Cooling type	Air cooled
Fan	Air suction, aluminum
Electrical system	
Alternator	14V×65A
Voltage regulation	Built-in IC regulator
Starter motor	12V×3.8kW
Intake and exhaust system	
Cooling air flow	3610m ³ /h
Combustion air flow	500m ³ /h
Max. intake pressure	50 (10 ² Pa)
Max. exhaust pressure	90 (10 ² Pa)
Exhaust temperature	570°C

APPROXIMATE FUEL CONSUMPTION

TR661G1	1500rpm		1800rpm	
LOAD	g/kWh	l/h	g/kWh	l/h
50%	241	12.70	245	15.55
75%	228	18.02	229	21.80
100%	225	23.71	226	28.69
110%	229	26.55	230	32.12

*Diesel fuel density 0.835 g/ cm³

POWER DERATING


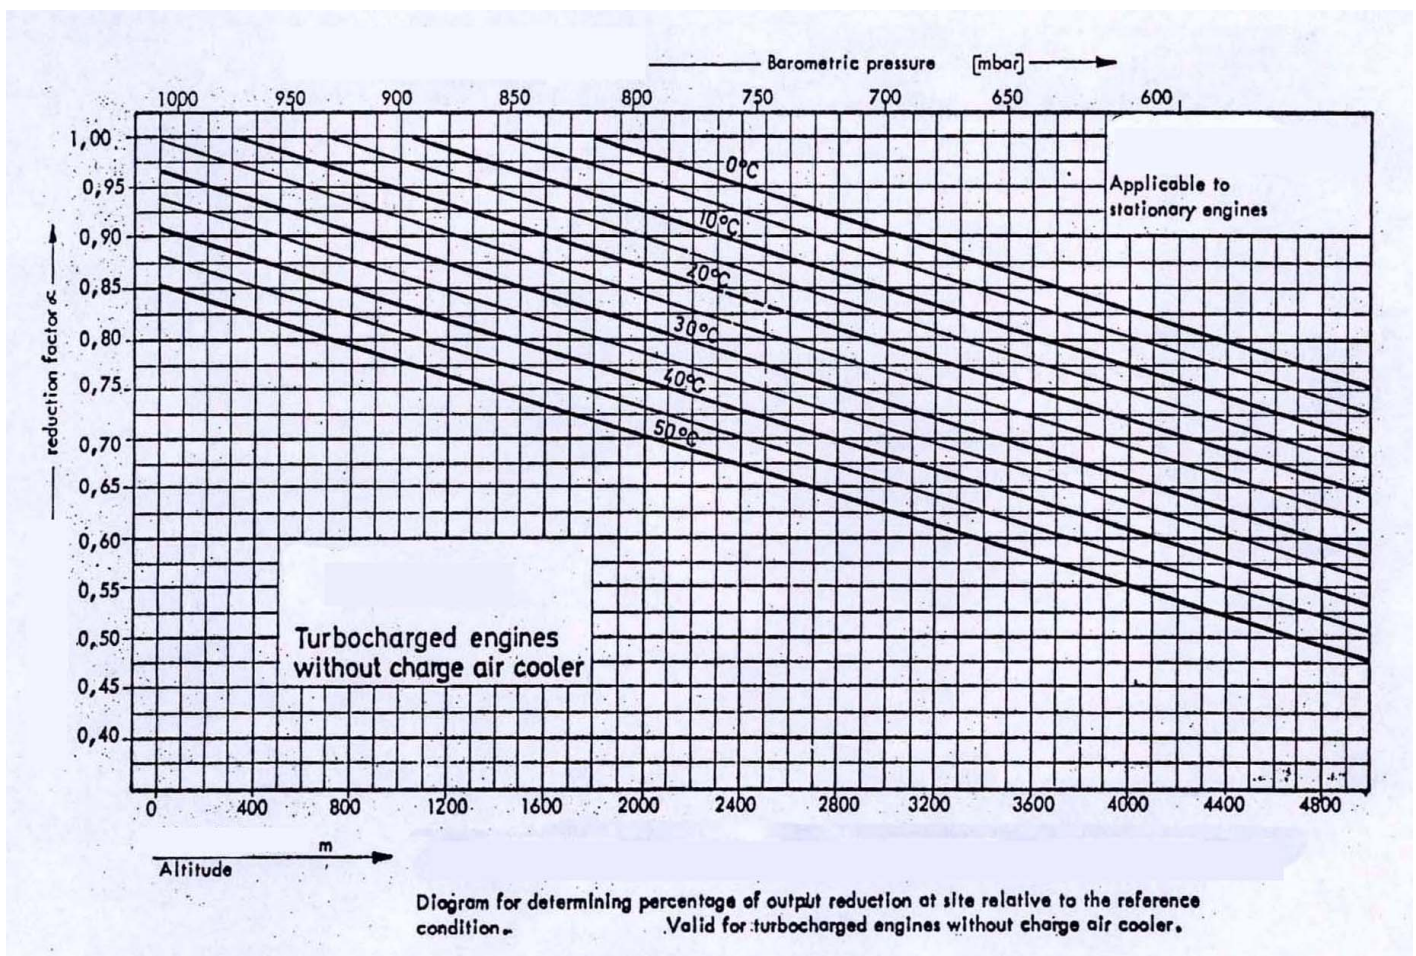


* Estimating the effect of altitude & temperature for the engine output relative to ISO reference condition at sea level.

* Inquiry should always be made to the technical department of the respective manufacturer if the attitude is higher than the diagram.

ENGINE NOISE LEVELS

Parameter	Engine Model
	TR661G1
Sound pressure level at 1m	≤100 dB(A)

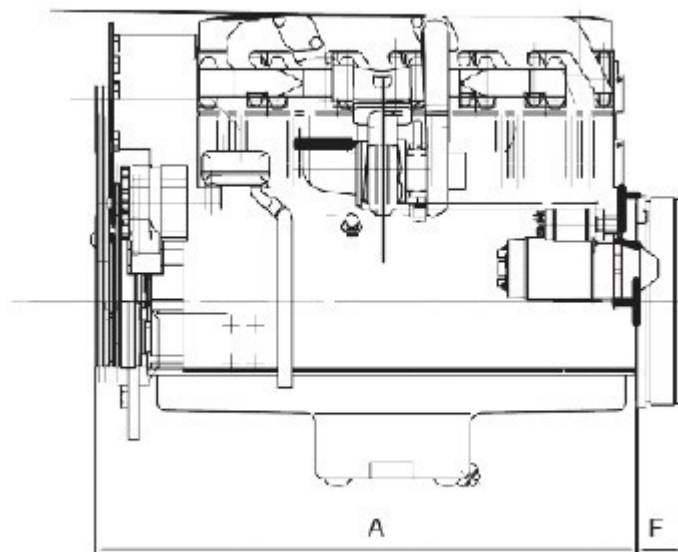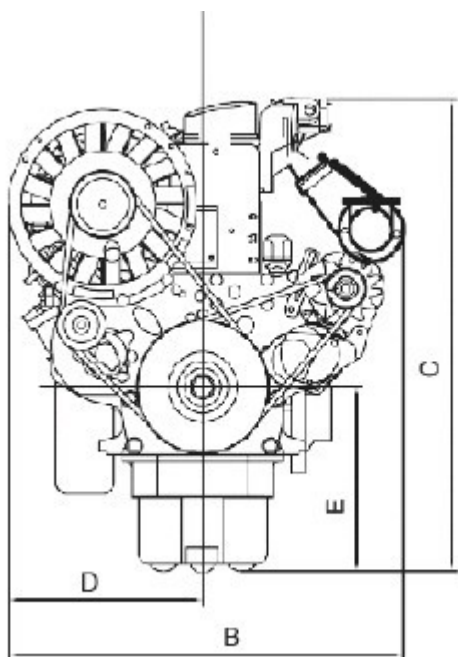APPROXIMATE DIMENSIONS AND WEIGHT

Engine Size(mm)	A	B	C	D	E	F	
						SAE 8-10	SAE 10-11.5
TR661G1	1003	771	812	351	278	105	88

Engine Dry Weight	525kg						
-------------------	-------	--	--	--	--	--	--

TYPICAL PACKING CASE DIMENSIONS

Engine packing case dimensions	Container quantities		
L*W*H(mm)	20FT	40FT	40HQ
TBA	TBA	TBA	TBA



Head Office
Lister Petter Engine Company Limited

Rutland House, Minerva Business Park,
Lynch Wood, Peterborough, PE2 6PZ.

Distributor Address



enquiry@listerpetter.com
www.listerpetter.com